


FLOW RANGE: 5 -14 GPM

OUTLET SIZE: 1 1/4" NPT

NOMINAL DIA. 4"

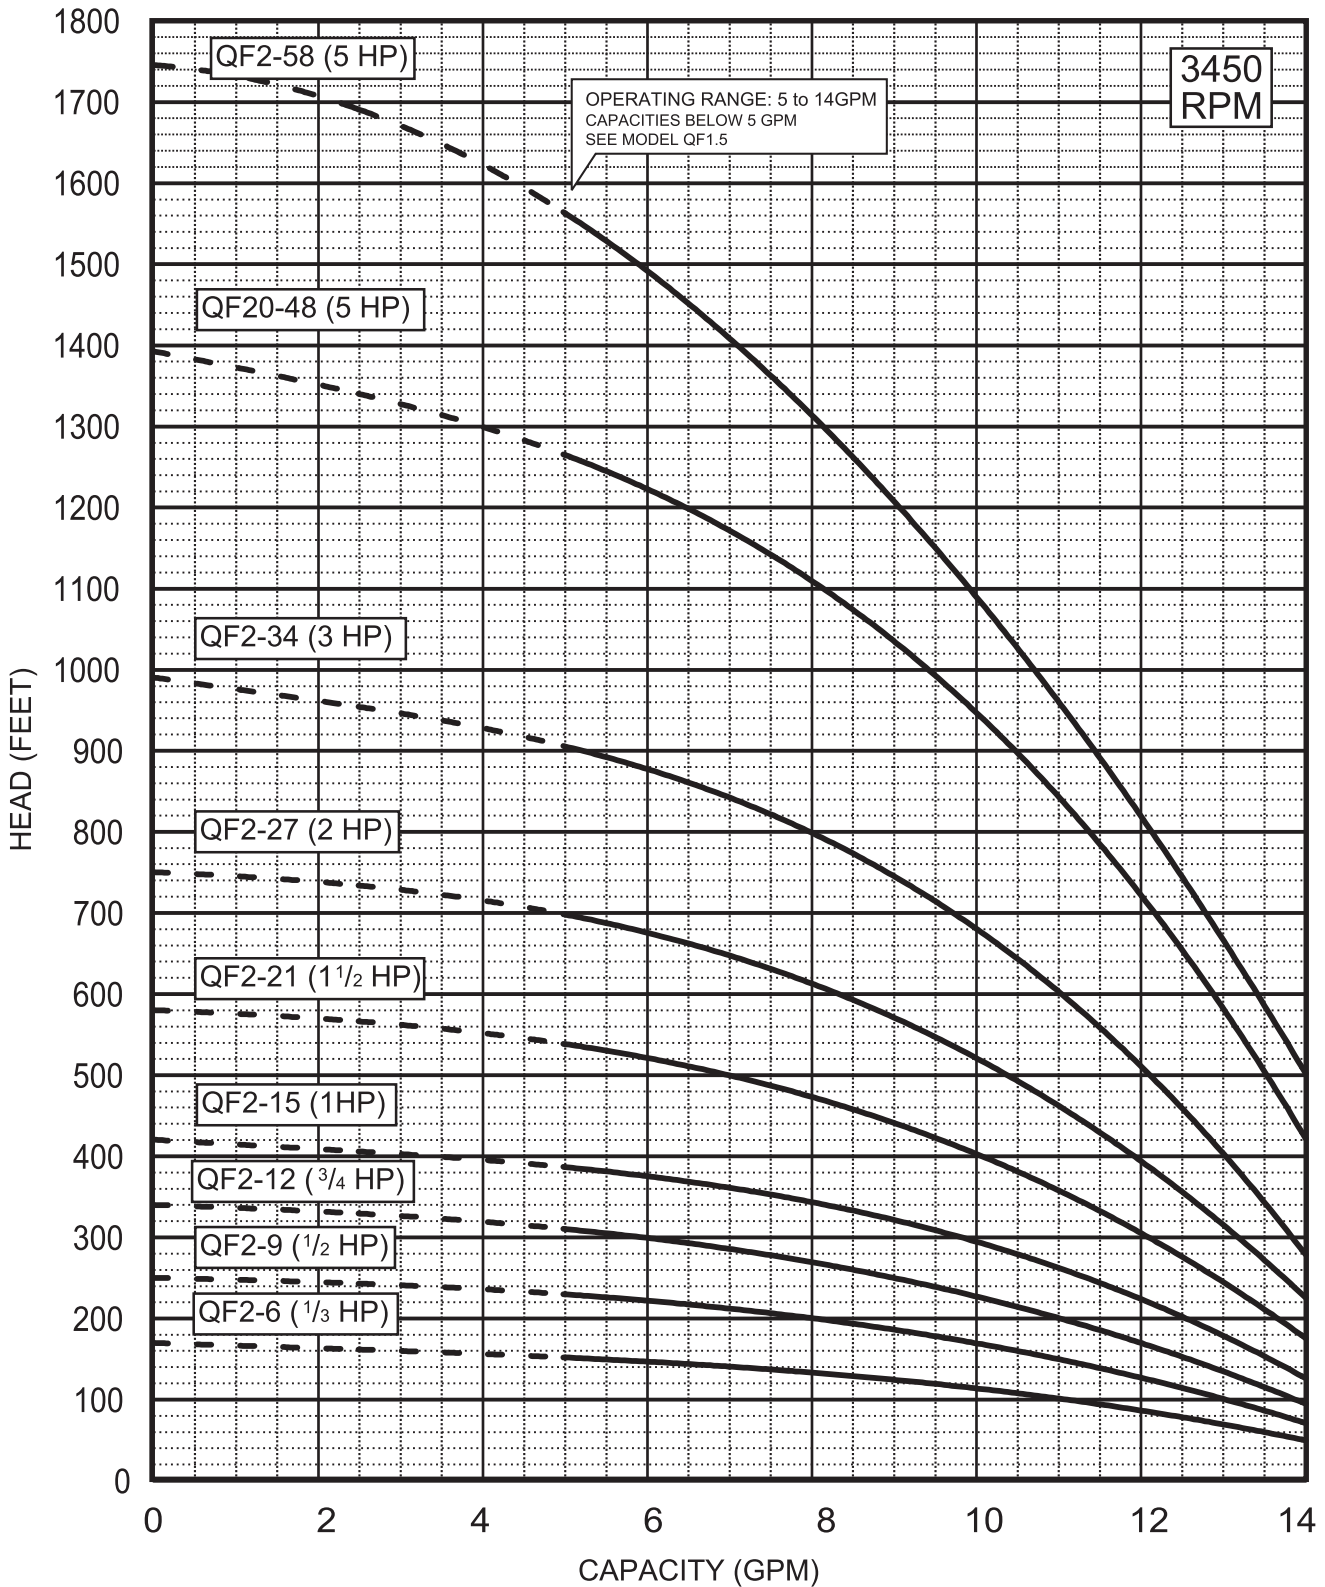


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
4" MOTOR STANDARD, 3450 RPM.

Performance conforms to ISO 9906 annex A
@ 2 ft. min. submergence.

DIMENSIONS AND WEIGHTS

| MODEL NO. | FIG. | HP | MOTOR SIZE | DISCH. SIZE | DIMENSIONS IN INCHES | | | | | APPROX. SHIP WT. |
|-----------|------|-------|------------|-------------|----------------------|------|------|-----|-----|------------------|
| | | | | | A | B | C | D | E | |
| QF 2-6 | A | 1/3 | 4" | 1 1/4" NPT | 19.9 | 8.8 | 11.1 | 3.8 | 3.9 | 26 |
| QF 2-9 | A | 1/2 | 4" | 1 1/4" NPT | 23.0 | 9.5 | 13.5 | 3.8 | 3.9 | 29 |
| QF 2-12 | A | 3/4 | 4" | 1 1/4" NPT | 26.7 | 10.7 | 16.0 | 3.8 | 3.9 | 32 |
| QF 2-15 | A | 1 | 4" | 1 1/4" NPT | 30.3 | 11.8 | 18.5 | 3.8 | 3.9 | 34 |
| QF 2-21 | A | 1 1/2 | 4" | 1 1/4" NPT | 37.1 | 13.6 | 23.5 | 3.8 | 3.9 | 44 |
| QF 2-27 | A | 2 | 4" | 1 1/4" NPT | 43.5 | 15.1 | 28.4 | 3.8 | 3.9 | 49 |
| QF 2-34 | A | 3 | 4" | 1 1/4" NPT | 54.7 | 20.6 | 34.1 | 3.8 | 3.9 | 83 |
| QF 2-48 | A | 5 | 4" | 1 1/4" NPT | 71.3 | 23.6 | 47.7 | 3.8 | 3.9 | 115 |
| QF 2-58* | B | 5 | 4" | 1 1/4" MPT | 88.2 | 23.6 | 64.5 | 3.8 | 4.3 | 142 |

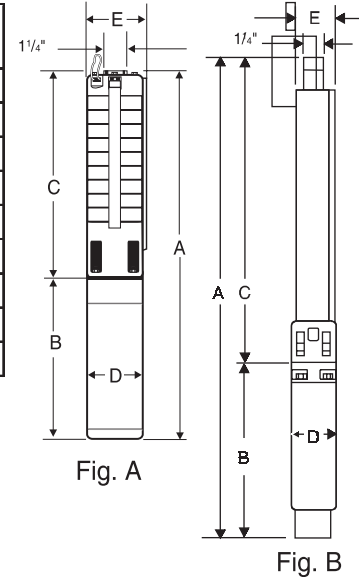

NOTES: All models suitable for use in 4" wells, unless otherwise noted.

Weights include pump end with motor in lbs.

* Built into sleeve 1 1/4" MPT discharge, 5" min. well dia.

MATERIALS OF CONSTRUCTION

| COMPONENT | SPLINED SHAFT (6-27 Stgs.) | CYLINDRICAL SHAFT (34-48 Stgs.) | DEEP SET (58 Stgs.) |
|------------------------|----------------------------|---------------------------------|-----------------------|
| Check Valve Housing | 304 Stainless Steel | 304 Stainless Steel | 304 Stainless Steel |
| Check Valve | 304 Stainless Steel | 304 Stainless Steel | 304 Stainless Steel |
| Diffuser Chamber | 304 Stainless Steel | 304 Stainless Steel | 304 Stainless Steel |
| Impeller | 304 Stainless Steel | 304 Stainless Steel | 304 Stainless Steel |
| Suction Interconnector | 304 Stainless Steel | 304 Stainless Steel | 304 Stainless Steel |
| Inlet Screen | 304 Stainless Steel | 304 Stainless Steel | 304 Stainless Steel |
| Pump Shaft | 304 L Stainless Steel | 304 L Stainless Steel | 304 L Stainless Steel |
| Straps | 304 Stainless Steel | 304 Stainless Steel | 304 Stainless Steel |
| Cable Guard | 304 Stainless Steel | 304 Stainless Steel | 304 Stainless Steel |
| Priming Inducer | 304 Stainless Steel | 304 Stainless Steel | 304 Stainless Steel |
| Coupling | 304 Stainless Steel | 304 Stainless Steel | 304 Stainless Steel |
| Check Valve Seat | NBR | NBR | NBR |
| Top Bearing | NBR | NBR | NBR |
| Impeller Seal Ring | NBR/PBT | NBR/PPS | NBR/PPS |
| Intermediate Bearings | NBR | NBR | NBR |
| Shaft Washer | Not Required | LCP | LCP |
| Split Cone | Not Required | 304 Stainless Steel | 304 Stainless Steel |
| Split Cone Nut | Not Required | 304 Stainless Steel | 304 Stainless Steel |
| Sleeve | Not Required | Not Required | 304 Stainless Steel |
| Sleeve Flange | Not Required | Not Required | Zincless Bronze* |

NOTES: Specifications subject to change without notice.

* Stainless Steel option available.