

**DIMENSIONS AND WEIGHTS**

Model No.	FIG	HP	MOTOR SIZE	DISCH. SIZE	DIMENSION IN INCHES					APPROX SHIP WT.
					A	B	C	D	E	
QF360-1A	A	30	6"	6" NPT	66.8	35.7	31.1	5.4	9.7	252
QF360-1*	A	40	6"	6" NPT	68.3	37.2	31.1	5.4	9.7	276
QF360-2AA*	A	60	6"	6" NPT	79.9	41.8	38.1	5.4	9.7	459
QF3602A	A	75	8"	6" NPT	85.5	47.4	38.1	7.6	9.7	558
QF360-2	A	100	8"	6" NPT	93.8	55.7	38.1	7.6	9.7	558
QF360-3AA	A	100	8"	6" NPT	100.8	55.7	45.1	7.6	9.7	657
QF360-3A	A	125	8"	6" NPT	102.1	57	45.1	7.7	9.7	836
QF360-3	A	125	8"	6" NPT	102.1	57	45.1	7.7	9.7	836
QF3604AA	A	150	8"	6" NPT	129.8	77.8	52	7.7	9.7	1007
QF360-4A	A	150	8"	6" NPT	129.8	77.8	52	7.7	9.7	1007
QF360-4	A	175	8"	6" NPT	137.8	85.8	52	7.7	9.7	1007
QF360-5AA*	A	175	8"	6" NPT	144.7	85.8	58.9	7.7	9.7	1089
QF3605A**	A	175	8"	6" NPT	144.7	85.8	58.9	7.7	9.7	1089
QF360-5*+	A	200	8"	6" NPT	153.7	94.8	58.9	7.7	9.7	1197
QF360-6AA+	A	250	10"	6" NPT	145.2	79.5	65.7	9.1	10.9	1263
QF360-6A+	A	250	10"	6" NPT	145.2	79.5	65.7	9.1	10.9	1263
QF360-6+	A	250	10"	6" NPT	145.2	79.5	65.7	9.1	10.9	1263

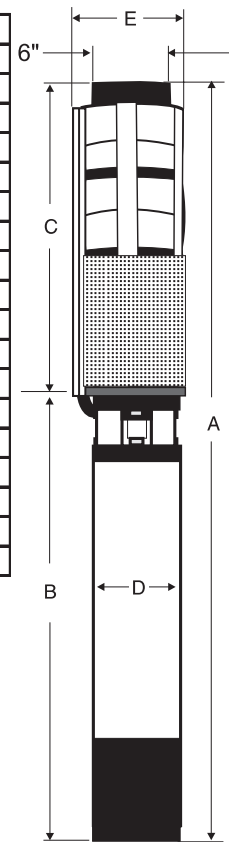



Fig. A

NOTES: All models suitable for use in 10" wells, unless equipped with 10" motor.  
Weights include pump end with motor in lbs.  
\* Alternate motor sizes available.

**MATERIALS OF CONSTRUCTION**

MATERIALS OF CONSTRUCTION	
COMPONENT	CYLINDRICAL SHAFT (2-18 Stgs.)
Valve Housing	304 Stainless Steel
Check Valve	304 Stainless Steel
Diffuser Chamber	304 Stainless Steel
Split Cone Nut	304 Stainless Steel
Split Cone	304 Stainless Steel
Impeller	304 Stainless Steel
Suction Inerconnector	304 Stainless Steel
Inlet Screen	304 Stainless Steel
Straps	304 Stainless Steel
Cable Guard	304 Stainless Steel
Coupling	304 Stainless Steel
Pump Shaft	Duplex Stainless Steel
Intermediate Bearings	NBR
Impeller Seal Ring	NBR /PPS
Top Bearing	NBR /304 Stainless Steel 304
Upthrust stop Ring	Carbon/Graphite HY 22
O-Ring	NBR
Valve Seat	304 Stainless Steel
Lower Valve Seat Retainer	304 Stainless Steel
Upper Valve Seat Retainer	304 Stainless Steel
Valve Guide	304 Stainless Steel
Valve Cup Spring	304 Stainless Steel


NOTES : Specifications are subject to change without notice.

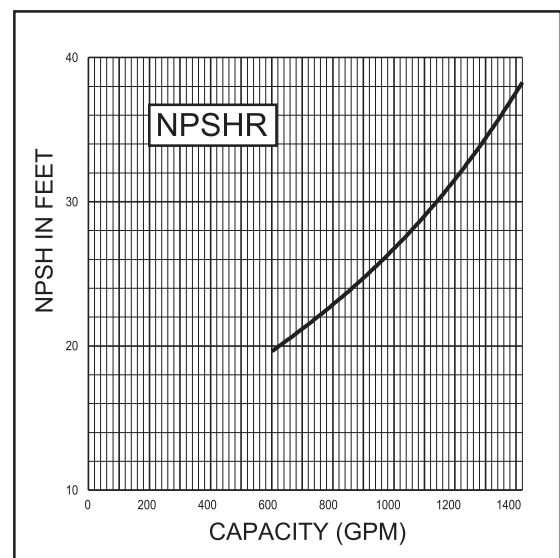

FLOW RANGE: 220 -1400 GPM

OUTLET SIZE: 6 " NPT

NOMINAL DIA. 10"

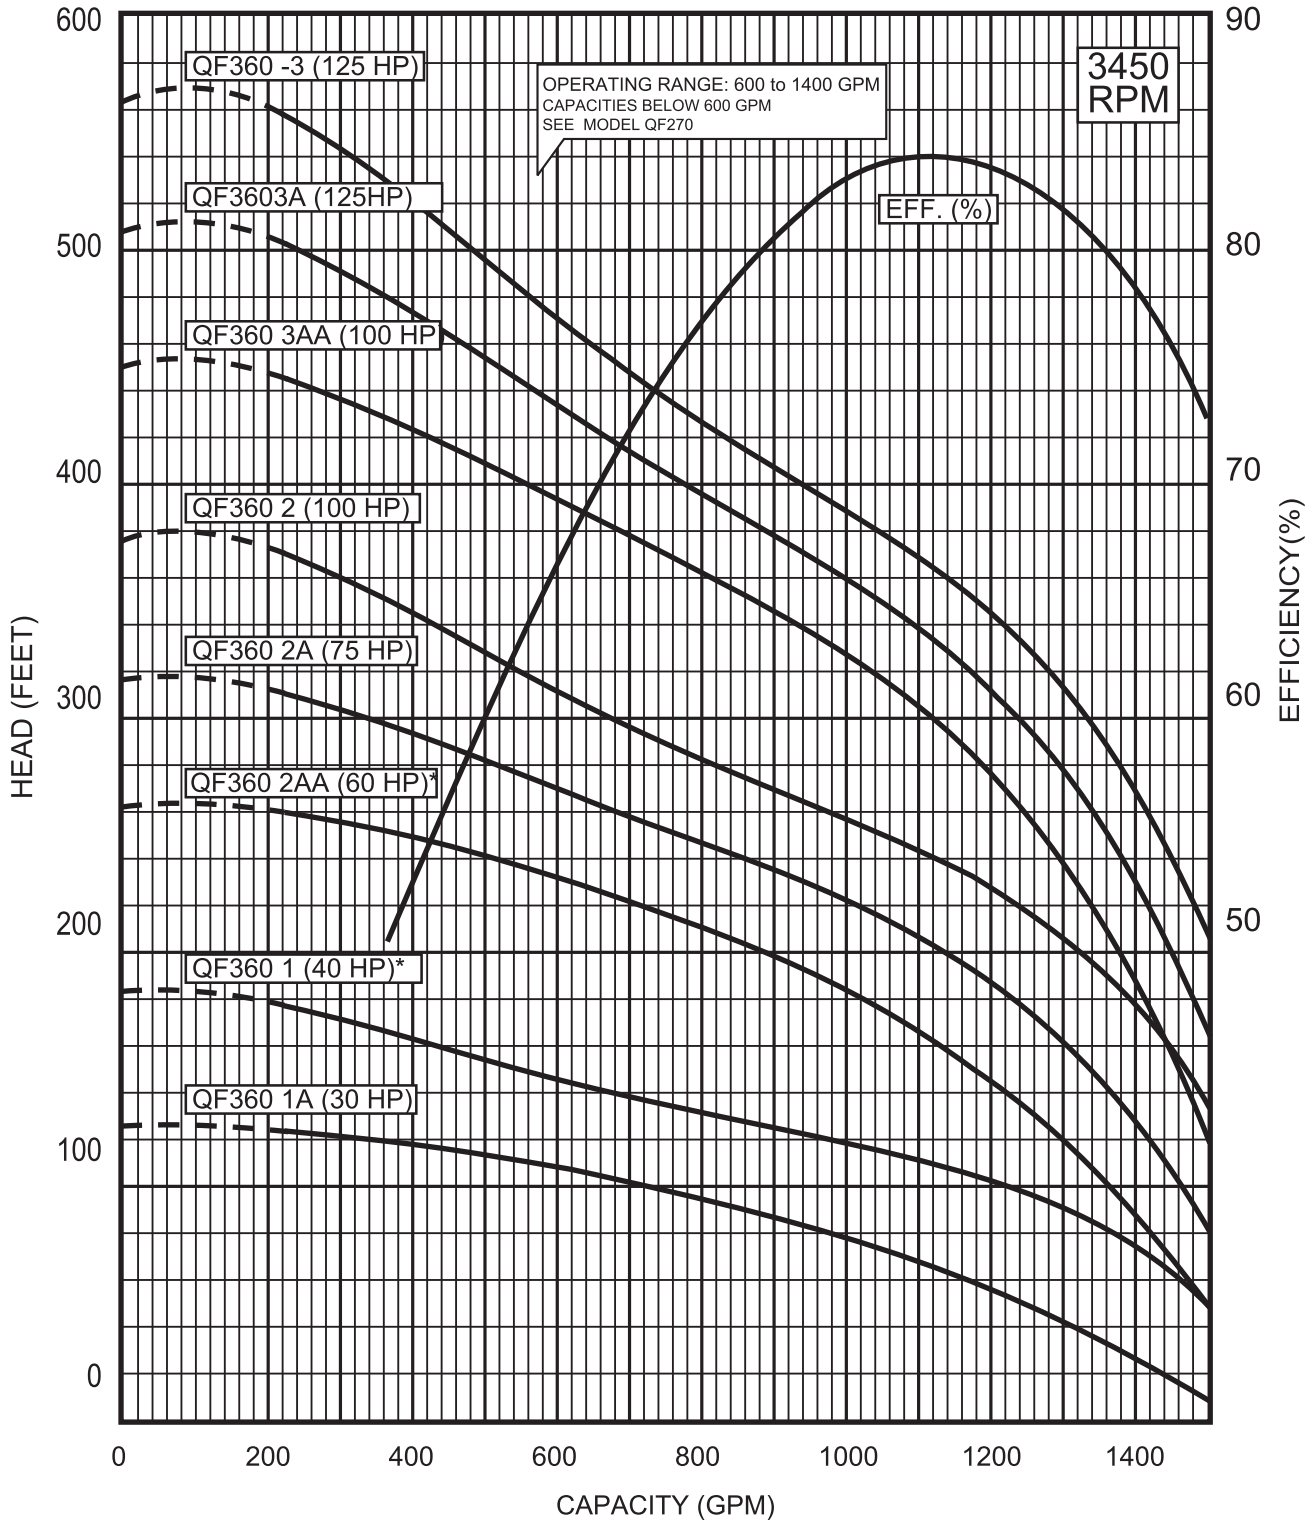


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.  
6" MOTOR STANDARD, 40 HP/3450 RPM.  
8" MOTOR STANDARD, 60-200 HP/3525 RPM.  
10" MOTOR STANDARD, 250 HP/3500 RPM.  
\* Alternate motor sizes available.

Performance conforms to ISO 9906 Annex A  
@ 10 ft. min. submergence.

FLOW RANGE: 220 -1400 GPM

OUTLET SIZE: 6 " NPT

NOMINAL DIA. 10"

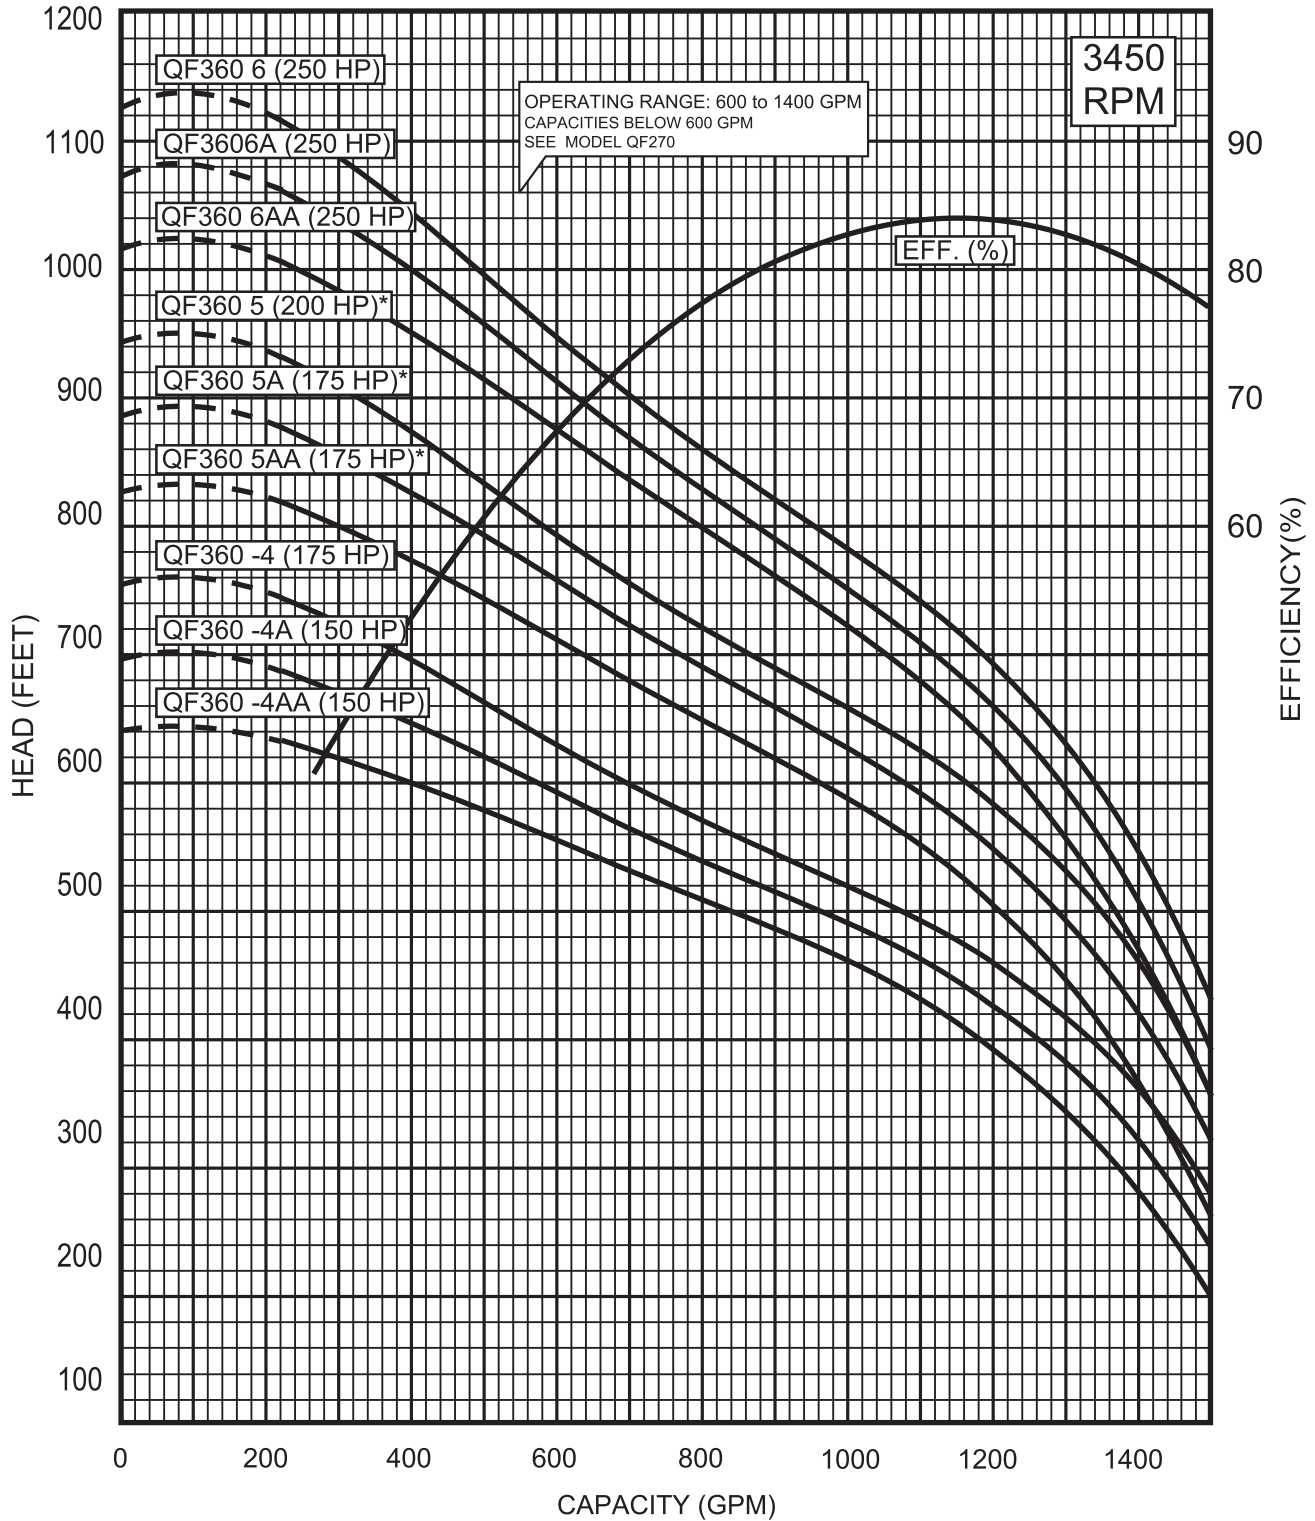

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.  
6" MOTOR STANDARD, 40 HP/3450 RPM.  
8" MOTOR STANDARD, 60-200 HP/3525 RPM.  
10" MOTOR STANDARD, 250 HP/3500 RPM.  
\* Alternate motor sizes available.

Performance conforms to ISO 9906 Annex A  
@ 10 ft. min. submergence.