


DIMENSIONS AND WEIGHTS

Model No.	FIG	HP	MOTOR SIZE	DISCH. SIZE	DIMENSION IN INCHES					APPROX SHIP WT.
					A	B	C	D	E	
QF75-1B-	A	2	4"	3" NPT	29.7	15.1	14.6	3.8	5.7	44
QF75-1A	A	3	4"	3" NPT	38.2	23.6	14.6	3.8	5.7	55
QF75-1	A	5	4"	3" NPT	44.2	29.6	14.6	3.8	5.7	65
QF75-2AB	A	5	4"	3" NPT	48.5	29.6	18.9	3.8	5.7	71
QF75-2	A	7.5	4"	3" NPT	48.5	29.6	18.9	3.8	5.7	88
QF75-2	A	7.5	6"	3" NPT	43	24.2	18.9	5.4	5.7	124
QF75-3BB	A	7.5	4"	3" NPT	53.5	29.6	23.9	3.8	5.7	96
QF75-3BB	A	7.5	6"	3" NPT	48.1	24.2	23.9	5.4	5.7	96
QF75-3	A	10	4"	3" NPT	67.8	43.9	23.9	3.8	5.7	146
QF75-3	A	10	6"	3" NPT	49.3	25.4	23.9	5.4	5.7	140
QF75-4BC	A	10	4"	3" NPT	72.3	43.9	28.4	3.8	5.7	147
QF75-4BC	A	10	6"	3" NPT	53.8	25.4	28.4	5.4	5.7	147
QF75-4	A	15	6"	3" NPT	56.4	28	28.4	5.4	5.7	161
QF75-5B	A	15	6"	3" NPT	60.8	28	32.8	5.4	5.7	165
QF75-5	A	20	6"	3" NPT	63.4	30.6	32.8	5.4	5.7	167
QF75-6	A	20	6"	3" NPT	67.8	30.6	37.3	5.4	5.7	186
QF75-7C	A	20	6"	3" NPT	67.8	30.6	37.3	5.4	5.7	202
QF75-7	A	25	6"	3" NPT	74.9	33.1	41.7	5.4	5.7	202
QF75-8B	A	25	6"	3" NPT	79.3	33.1	46.2	5.4	5.7	209
QF75-8	A	25	6"	3" NPT	79.3	33.1	46.2	5.4	5.7	209
QF75-9BB	A	25	6"	3" NPT	83.8	33.1	50.6	5.4	5.7	228
QF75-9	A	30	6"	3" NPT	86.3	35.7	50.6	5.4	5.7	228
QF75-10*	A	40	6"	3" NPT	95.9	40.81	55.1	5.4	5.7	234
QF75-11*	A	40	6"	3" NPT	100.3	40.81	59.5	5.4	5.7	273
QF75-12*	A	40	6"	3" NPT	104.4	40.81	64	5.4	5.7	279
QF75-13*	A	40	6"	3" NPT	109.2	40.81	68.4	5.4	5.7	284
QF75-14*	A	50	6"	3" NPT	130.7	57.83	72.9	5.4	5.7	388
QF75-15*	A	50	6"	3" NPT	135.2	57.83	77.3	5.4	5.7	393
QF75-16*	A	50	6"	3" NPT	139.2	57.83	81.8	5.4	5.7	399
QF75-17*	A	60	6"	3" NPT	151.2	63.83	87.4	5.4	5.7	438
QF75-18*	A	60	6"	3" NPT	155.6	63.83	91.8	5.4	5.7	445
QF75-19*	A	60	6"	3" NPT	160.1	63.83	96.3	5.4	5.7	449
QF75-17	A	60	8"	3" NPT	129.2	41.79	87.4	7.5	7.6	544
QF75-18	A	60	8"	3" NPT	133.6	41.79	91.8	7.5	7.6	551
QF75-19	A	60	8"	3" NPT	138	41.79	96.3	7.5	7.6	555
QF75-20**	B	75	8"	4" M-NPT	154.7	47.41	107.3	7.5	7.6	634
QF75-20**	B	75	8"	4" M-NPT	163.6	47.41	116.2	7.5	7.6	681

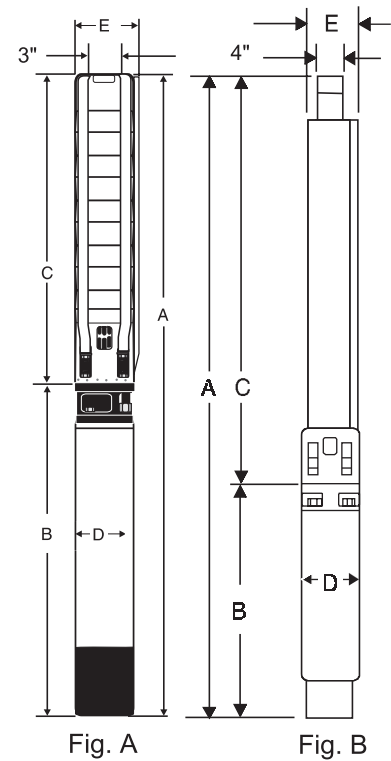

NOTES: All models suitable for use in 6" wells, unless equipped with 8" motor.

* Alternate motor sizes available.

** Built into sleeve, 4" NPT, 8" motor required.


Weights include pump end with motor in lbs.

MATERIALS OF CONSTRUCTION

COMPONENT	CYLINDRICAL SHAFT (2-18 Stgs.)
Check Valve Housing	304 Stainless Steel
Check Valve	304 Stainless Steel
Diffuser Chamber	304 Stainless Steel
Split Cone Nut	304 Stainless Steel
Split Cone	304 Stainless Steel
Impeller	304 Stainless Steel
Suction Interconnector	304 Stainless Steel
Inlet Screen	304 Stainless Steel
Straps	304 Stainless Steel
Cable Gurad	304 Stainless Steel
Coupling	304 Stainless Steel
Pump Shaft	Duplex Stainless Steel
Intermediate Bearings	NBR
Impeller Seal Ring	NBR /304 Stainless Steel
Check Valve Seat	NBR /304 Stainless Steel
Top/Lower Bearing	NBR /304 Stainless Steel
8" Motor Adaptor Plate	304 Stainless Steel
Upthrust stop ring	304 S.S./Tungsten Carbide
Sleeve *	304 Stainless Steel
Sleeve Flange*	Zinc less braze*

NOTES: Specifications subject to change without notice.


* Required for 20-22 stage only.

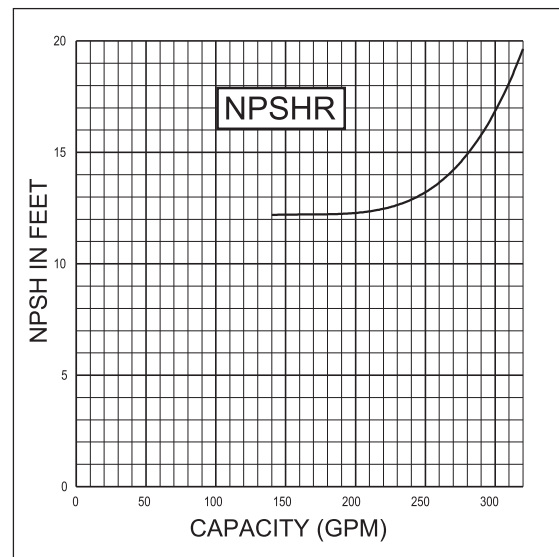

FLOW RANGE: 160 -320 GPM

OUTLET SIZE: 3" NPT

NOMINAL DIA. 6"

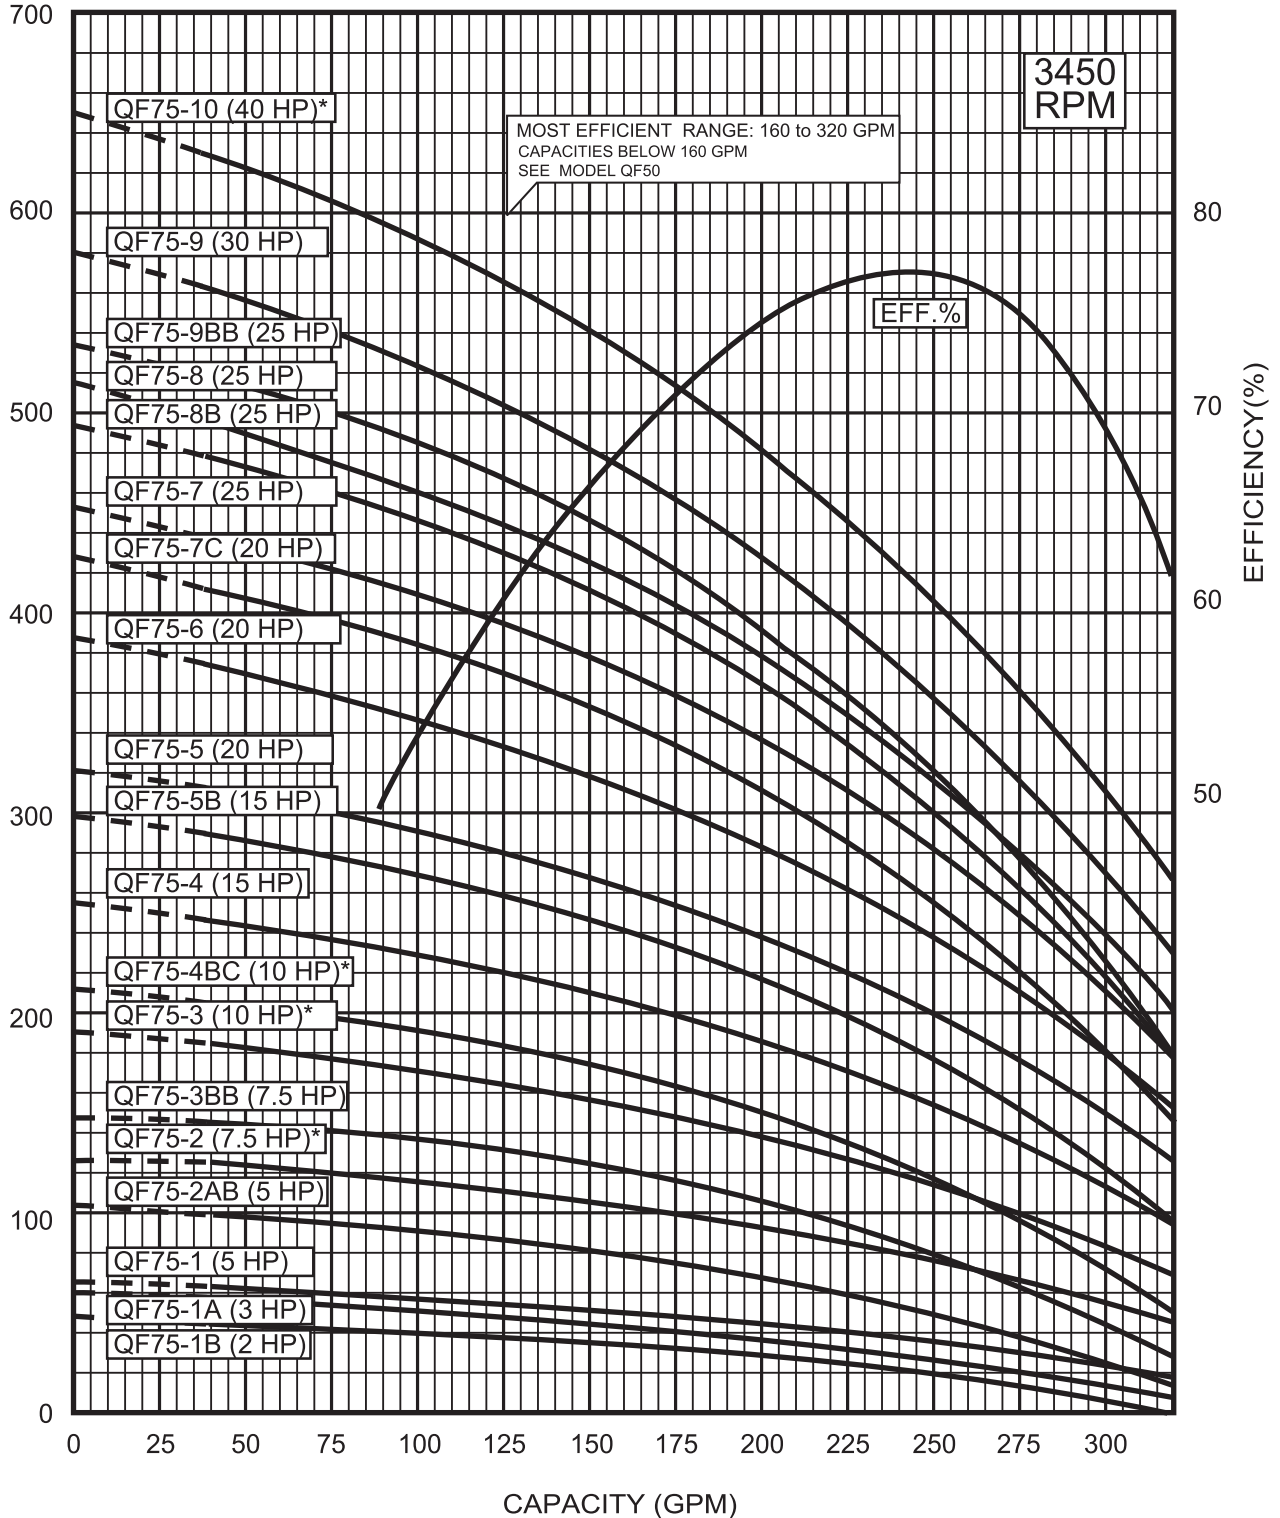

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

4" MOTOR STANDARD, 7.5 HP/3450 RPM

6" MOTOR STANDARD, 7.5-40 HP/3450 RPM.

8" MOTOR STANDARD, 50-75 HP/3525 RPM.


* Alternate motor sizes available.

Performance conforms to ISO 9906 Annex A
@ 8 ft. min. submergence.

FLOW RANGE: 160 -320 GPM

OUTLET SIZE: 3" NPT

NOMINAL DIA. 6"

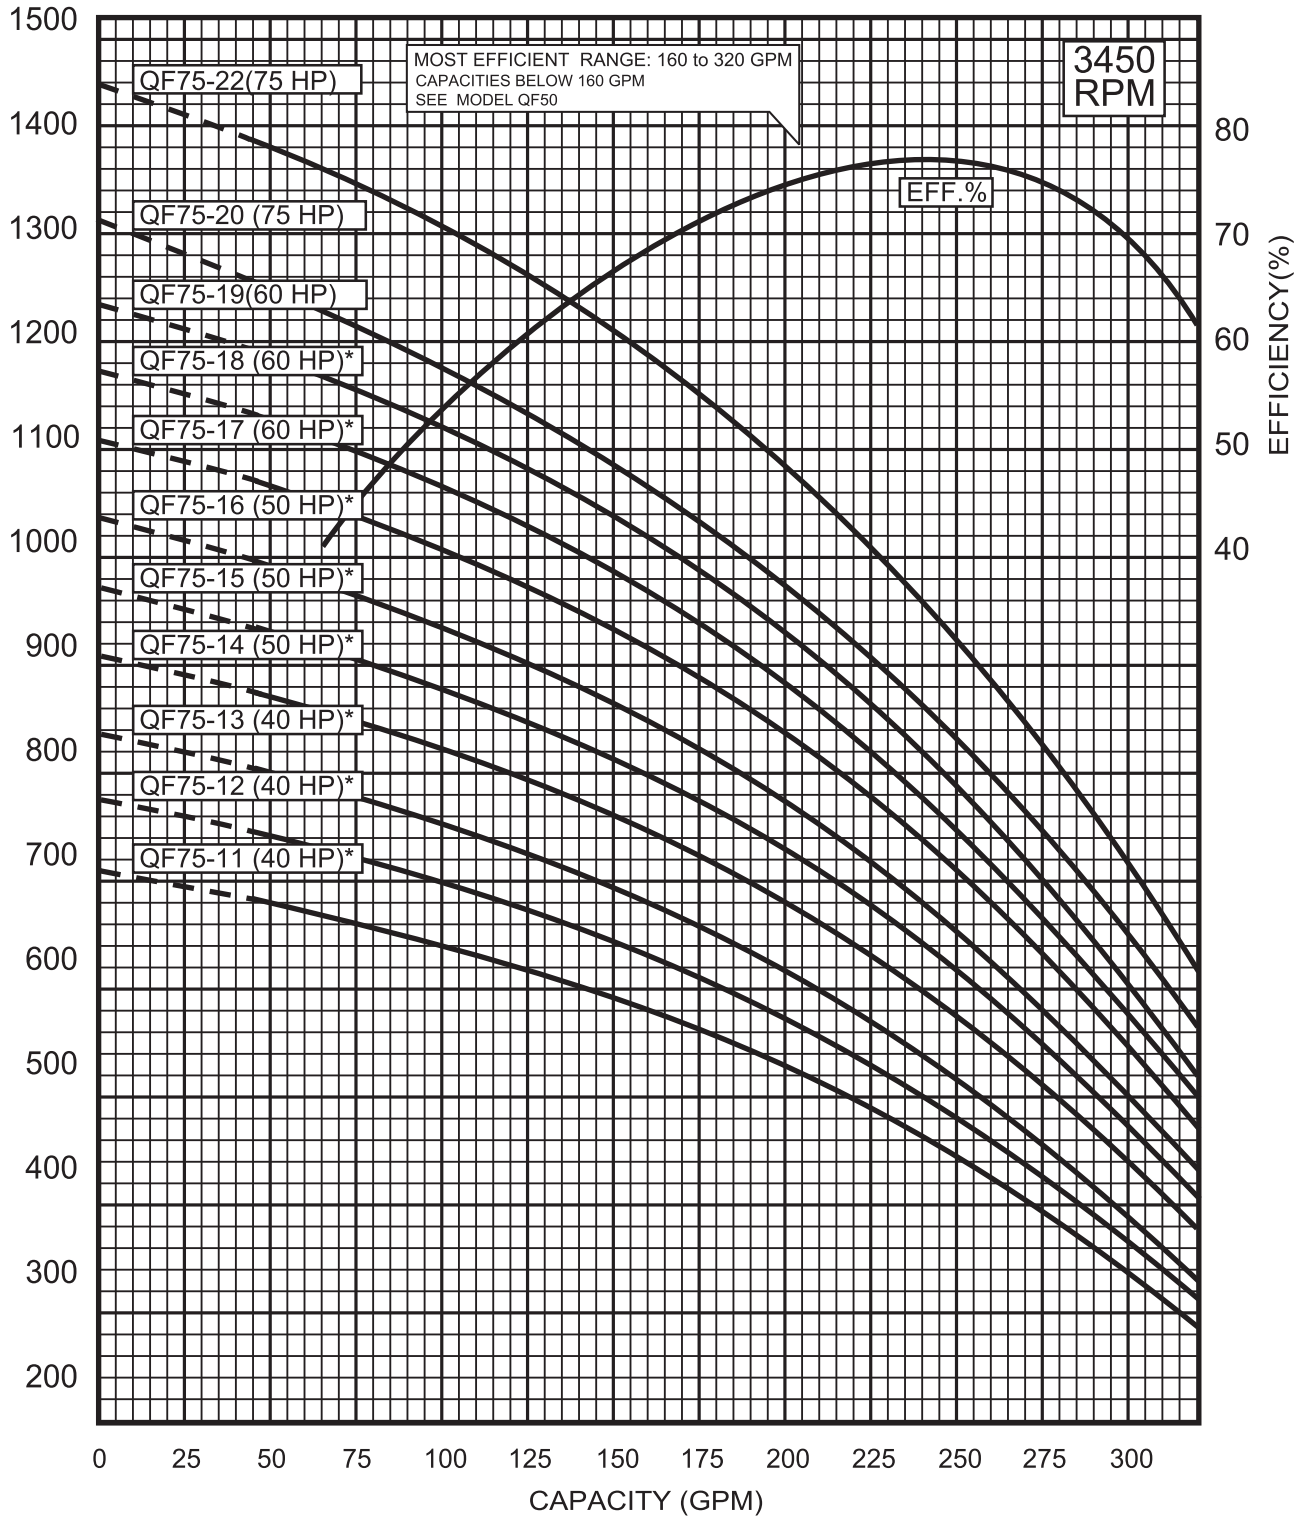

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
4" MOTOR STANDARD, 7.5 HP/3450 RPM
6" MOTOR STANDARD, 7.5-40 HP/3450 RPM.
8" MOTOR STANDARD, 50-75 HP/3525 RPM.
* Alternate motor sizes available.

Performance conforms to ISO 9906 Annex A
@ 8 ft. min. submergence.