


FLOW RANGE: 40 -75 GPM

OUTLET SIZE: 2 " NPT

NOMINAL DIA. 4"

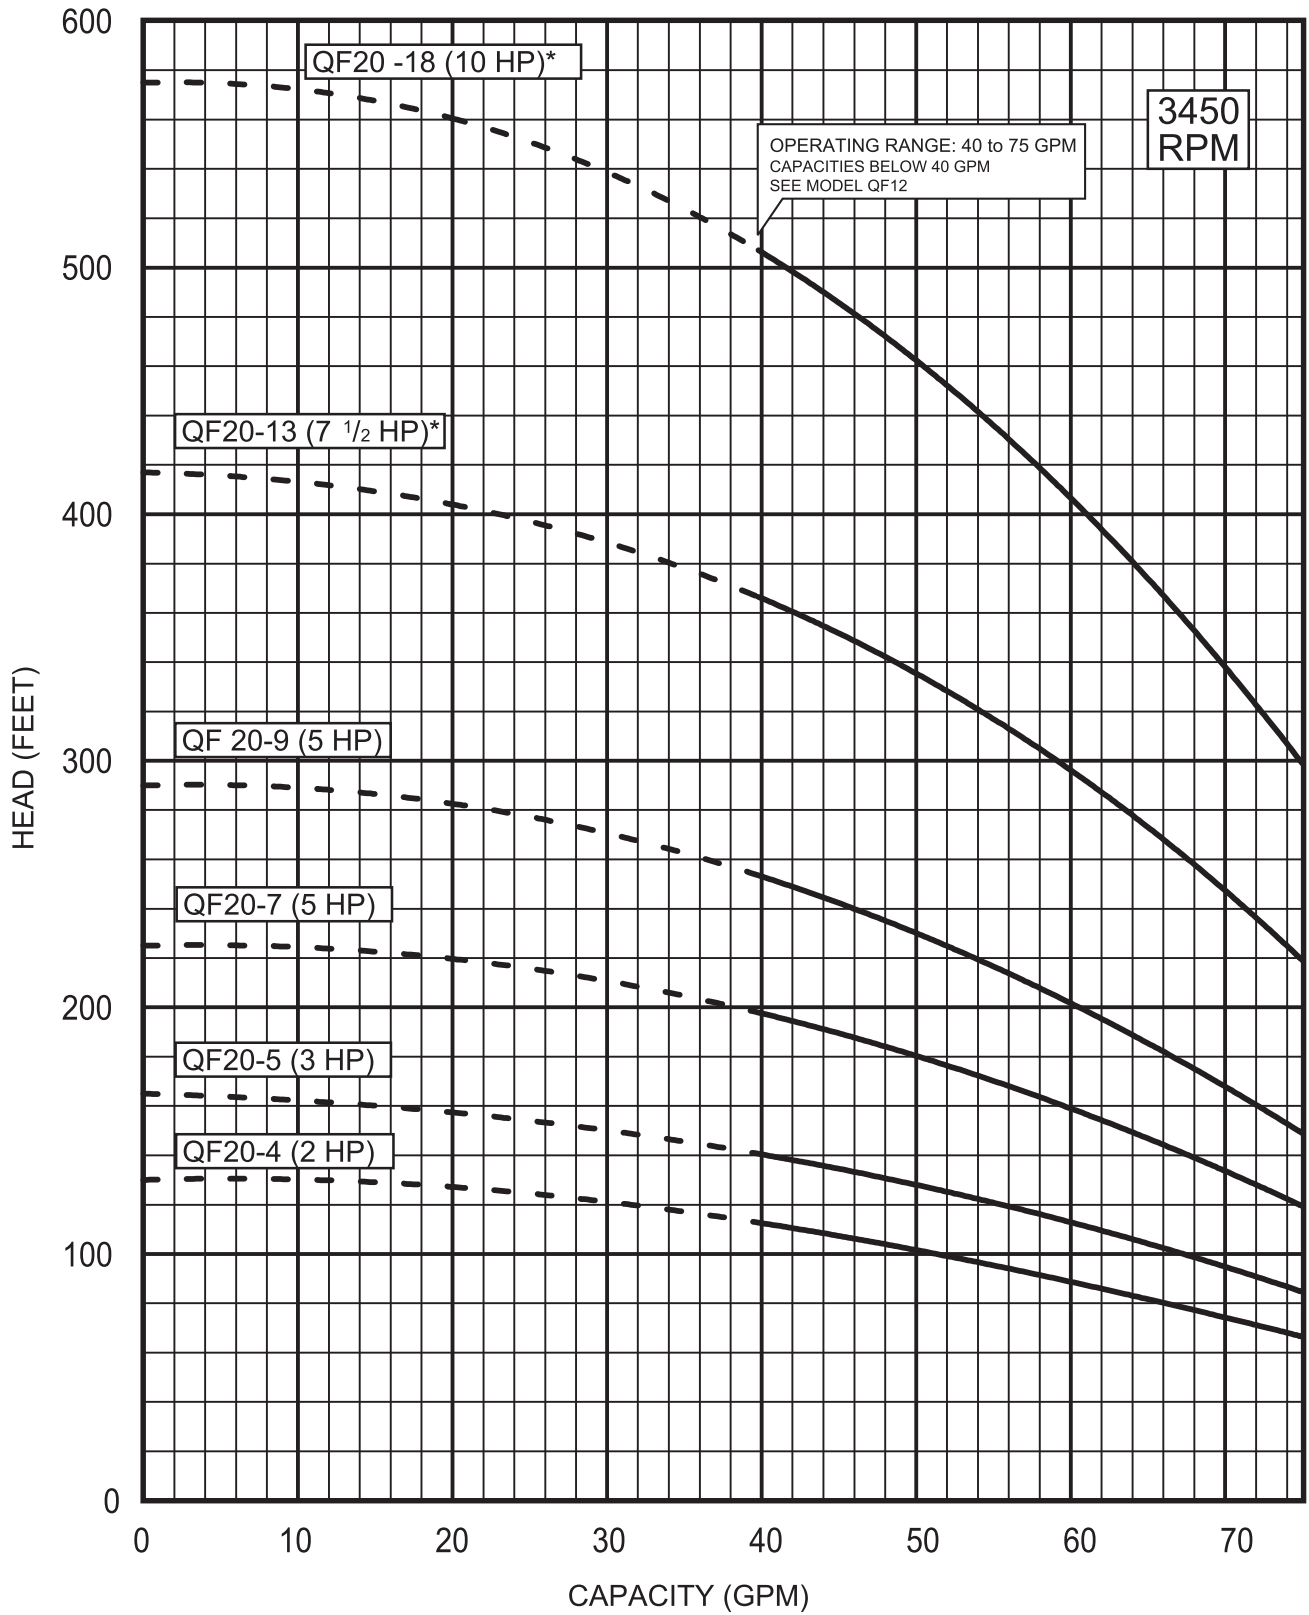

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

* Also available with 6" motor.

Performance conforms to ISO 9906 Annex A @ 5 ft. min. submergence.

DIMENSIONS AND WEIGHTS

MODEL NO.	FIG.	HP	MOTOR SIZE	DISCH. SIZE	DIMENSIONS IN INCHES					APPROX. SHIP WT.
					A	B	C	D	E	
QF 20-4	A	2	4"	2" NPT	32.6	15.1	17.5	3.8	3.9	39
QF 20-5	A	3	4"	2" NPT	40.7	20.6	20.1	3.8	3.9	64
QF 20-7	A	5	4"	2" NPT	48.8	23.6	25.2	3.8	3.9	75
QF 20-9	A	5	4"	2" NPT	53.9	23.6	30.3	3.8	3.9	80
QF 20-13*	A	7 1/2	4"	2" NPT	70.1	29.6	40.5	3.8	3.9	105
QF 20-18*	A	10	4"	2" NPT	97.3	43.9	53.4	3.8	3.9	160

NOTES: All models suitable for use in 4" wells, unless otherwise noted.
Weights include pump end with motor in lbs.
* Also available with 6" motor.

MATERIALS OF CONSTRUCTION

COMPONENT	CYLINDRICAL SHAFT (4-18 Stgs.)
Check Valve Housing	304 Stainless Steel
Check Valve	304 Stainless Steel
Diffuser Chamber	304 Stainless Steel
Impeller	304 Stainless Steel
Suction Interconnector	304 Stainless Steel
Inlet Screen	304 Stainless Steel
Pump Shaft	Duplex Stainless Steel
Straps	304 Stainless Steel
Cable Guard	304 Stainless Steel
Priming Inducer	304 Stainless Steel
Coupling	304 Stainless Steel
Check Valve Seat	NBR
Top Bearing	NBR
Impeller Seal Ring	NBR
Intermediate Bearings	NBR
Shaft Washer	LCP
Split Cone	304 Stainless Steel
Split Cone Nut	304 Stainless Steel

NOTES: Specifications are subject to change without notice.

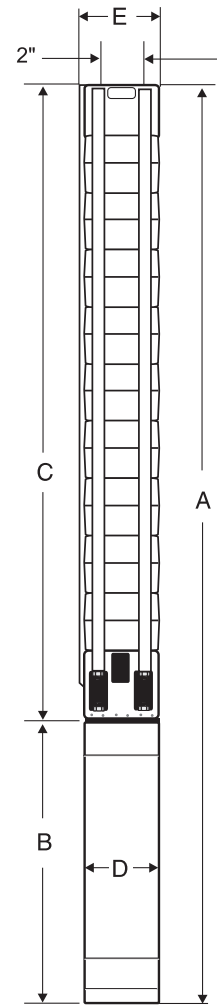


Fig. A