

DIMENSIONS AND WEIGHTS

Model No.	FIG	HP	MOTOR SIZE	DISCH. SIZE	DIMENSION IN INCHES					APPROX SHIP WT.
					A	B	C	D	E	
QF2101A	A	15	6"	6" NPT	50.6	25	25.6	5.4	8.3	208
QF210-1	A	20	6"	6" NPT	56.2	30.6	25.6	5.4	8.3	217
QF210-2AA	A	30	6"	6" NPT	63.8	32	31.8	5.4	8.3	296
QF210-2A	A	40	6"	6" NPT	66.2	34.4	31.8	5.4	8.3	307
QF210-2*	A	40	6"	6" NPT	66.2	34.4	37.9	5.4	8.3	320
QF210-3AA*	A	50	6"	6" NPT	93.6	55.7	37.9	5.4	8.3	415
QF210-3A*	A	60	6"	6" NPT	99.6	61.7	37.9	5.4	8.3	448
QF210-3*	A	60	6"	6" NPT	99.6	61.7	44.4	5.4	8.3	448
QF210-4AA	A	75	6"	6" NPT	91.4	47.4	44	7.5	8.6	560
QF210-4A	A	75	6"	6" NPT	91.4	47.4	44	7.6	8.6	560
QF2104	A	100	8"	6" NPT	98.9	54.9	50.1	7.6	8.6	638
QF210-5AA	A	100	8"	6" NPT	105	54.9	50.1	7.6	8.6	661
QF210-5A	A	100	8"	6" NPT	105	54.9	50.1	7.6	8.6	661
QF2105	A	100	8"	6" NPT	105	54.9	56.2	7.6	8.6	661
QF210-6AA	A	125	8"	6" NPT	125	68.8	56.2	7.7	8.6	855
QF210-6A	A	125	8"	6" NPT	125	68.8	56.2	7.7	8.6	855
QF210-6	A	125	8"	6" NPT	125	68.8	62.4	7.7	8.6	855
QF210-7AA	A	125	8"	6" NPT	131.2	68.8	62.4	7.7	8.6	890
QF210-7A	A	150	8"	6" NPT	140.2	77.8	62.4	7.7	8.6	983
QF210-7	A	150	8"	6" NPT	140.2	77.8	62.4	7.7	8.6	983

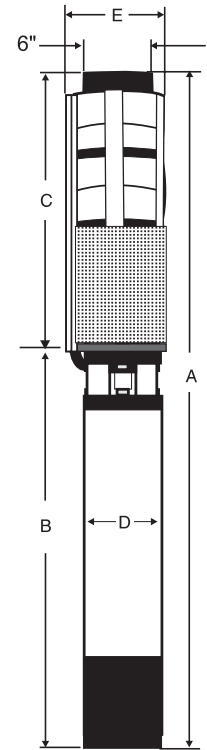



Fig. A

NOTES: All models suitable for use in 8" wells unless otherwise noted.
Weights include pump end with motor in lbs.
*Alternate motor sizes available.

MATERIALS OF CONSTRUCTION

MATERIALS OF CONSTRUCTION	
COMPONENT	CYLINDRICAL SHAFT (2-18 Stgs.)
Valve Housing	304 Stainless Steel
Check Valve	304 Stainless Steel
Diffuser Chamber	304 Stainless Steel
Split Cone Nut	304 Stainless Steel
Split Cone	304 Stainless Steel
Impeller	304 Stainless Steel
Suction Inerconnector	304 Stainless Steel
Inlet Screen	304 Stainless Steel
Straps	304 Stainless Steel
Cable Guard	304 Stainless Steel
Coupling	304 Stainless Steel
Pump Shaft	Duplex Stainless Steel
Intermediate Bearings	NBR
Impeller Seal Ring	NBR /PPS
Check Valve Seat	NBR /304 Stainless Steel
Top Bearing	NBR /304 Stainless Steel
Upthrust stop Ring	Carbon/Graphite HY 22
O-Ring	NBR
Valve Seat	304 Stainless Steel
Lower Valve Seat Retainer	304 Stainless Steel
Upper Valve Seat Retainer	304 Stainless Steel
Valve Guide	304 Stainless Steel


NOTES : Specifications are subject to change without notice.

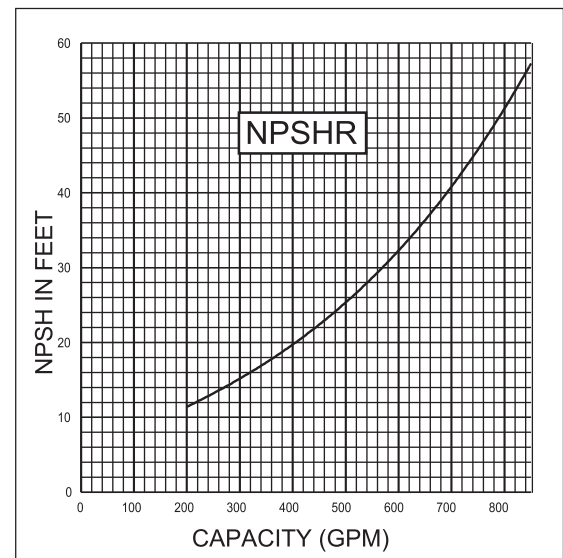

FLOW RANGE: 125 - 850 GPM

OUTLET SIZE: 6" NPT

NOMINAL DIA. 10"

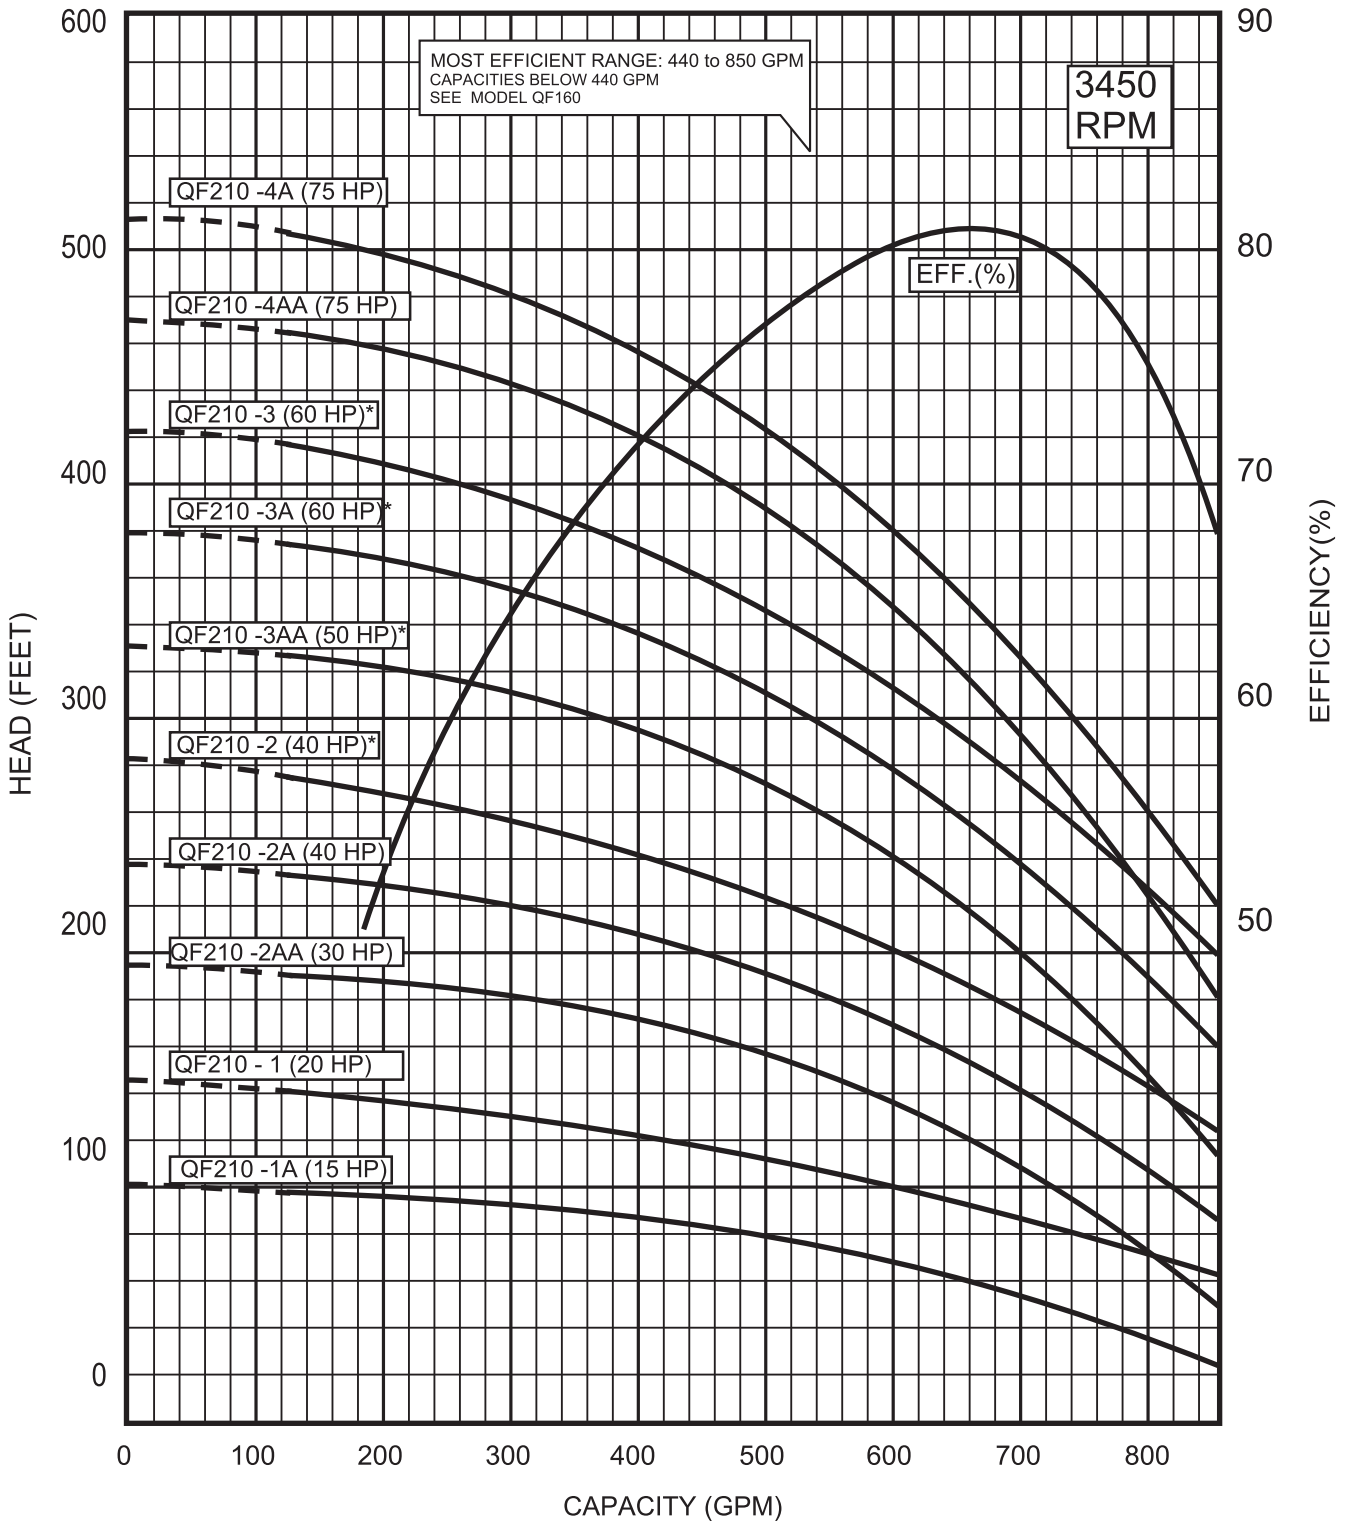


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
6" MOTOR STANDARD, 15-60 HP/3450 RPM.
8" MOTOR STANDARD, 75-150 HP/3525 RPM.
* Alternate motor sizes available.

Performance conforms to ISO 9906 Annex A
@ 10 ft. min. submergence.

FLOW RANGE: 125 - 850 GPM

OUTLET SIZE: 6" NPT

NOMINAL DIA. 10"

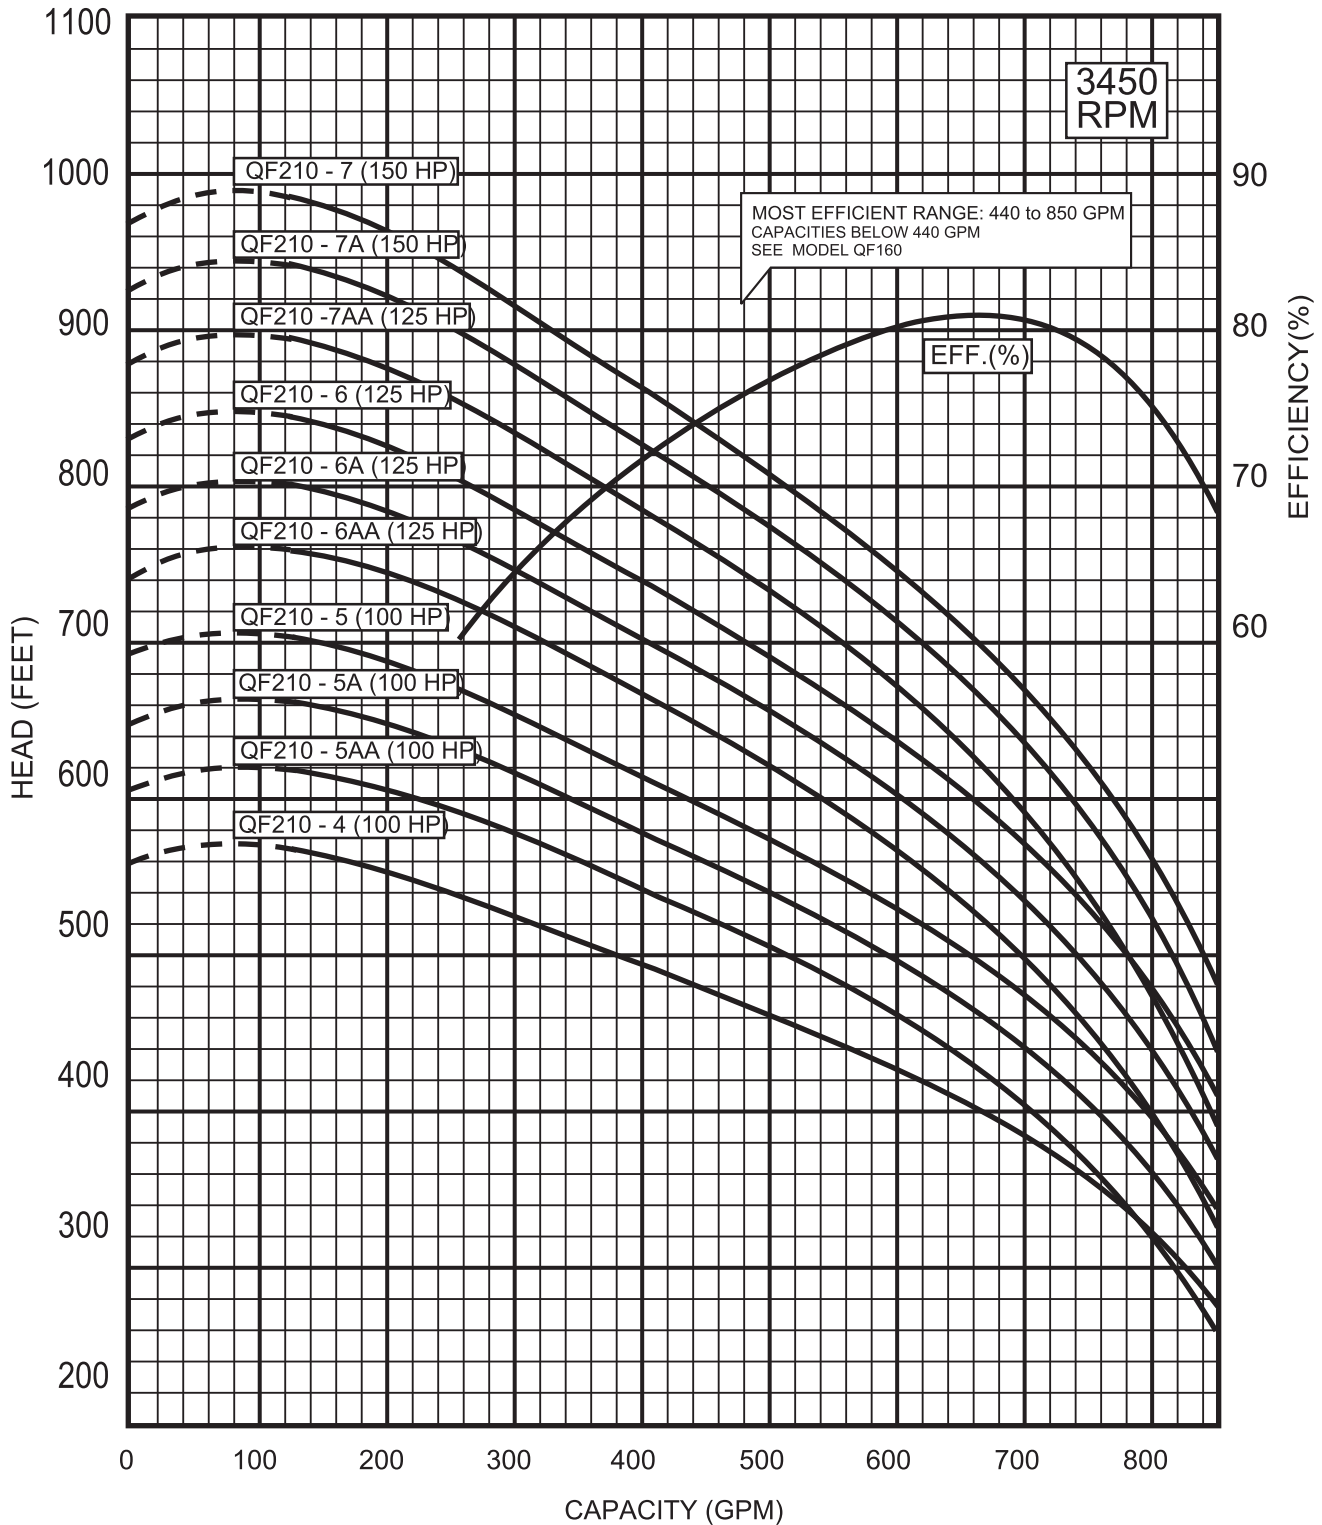

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
6" MOTOR STANDARD, 15-60 HP/3450 RPM.
8" MOTOR STANDARD, 75-150 HP/3525 RPM.
* Alternate motor sizes available.

Performance conforms to ISO 9906 Annex A
@ 10 ft. min. submergence.